

MC-TW3006E

Interactive Ultra Short Throw 3LCD Laser Projector



Introducing our interactive 3LCD MC-TW3006E projector, which combines all our technical expertise with our market leading knowledge.

This easy to install, interactive 3LCD ultra short throw projector can reach up to 3,300 ANSI lumens. The compact, lightweight design, integrates a powerful 10,000: 1 contrast ratio with a WXGA resolution, providing clarity on images even within very bright / light environments.

Key Features:

- WXGA 1280 x 800 resolution
- 3,300 ANSI lumens / colour output
- 10,000:1 contrast ratio
- Starboard Interactive Software included
- Digital zoom and powered focus
- Filter life 4,000 hours
- 3 year warranty


Please note: This is a preliminary data sheet. Content, technical specifications and images are subject to change.

MC-TW3006E Interactive Ultra Short Throw 3LCD Laser Projector

Technical Specifications

Panel Size	3LCD 15mm (0.59")
Panel Structure	3LCD
Resolution	WXGA (1280 x 800)
Light Output (Brightness) ANSI Lumens	3,300 (Normal), 2706 (Eco), 2244 (Eco-2)
Contrast Ratio	10,000:1
Lamp Life (Hours)	4,000 (Normal), 5,000 (Eco), 6,000 (Eco-2)
Lens	Built-in
Lens Zoom	Digital Zoom x 1.35
Lens Focus	Powered Focus
Focus Distance	0.409 – 0.689m
Distance to Width Ratio/Throw Ratio (:1)	0.3
Diagonal Display Size	60 – 100"
Speakers	16W mono
Digital Keystone Correction (Degrees)	Horizontal ± 5°, Vertical ± 5°
Digital Input	HDMI x 2
Analogue Input	15 pin Mini D-Sub x 2, RCA Jack x 1
Video Output	15 pin Mini D-Sub x 1
Audio Input	3.5mm Stereo Mini Jack x1, RCA Jack (L/R) x 1
Audio Output	3.5mm Stereo Mini Jack x 1
RS-232C Control	1 x 9-pin D-Sub
Wireless LAN	USB-WL-11N wireless adaptor (optional)
Wired LAN	Yes
USB Type-A	Used for PC-less presentation, wireless network or optional wireless pen tablet TB-1
USB Type B	Interactive function, USB display, or USB mouse control

Power Supply	AC 100V – 120V / AC 220V – 240V (50/60Hz)
Operating Power Consumption	360W
Standby Power Consumption	Less than 0.35W
Weight	4.3Kg
Dimensions (W x H x D)	377 x 136 x 360mm
Noise (Normal)	36dB (Normal), 32dB (Eco), 28dB (Eco-2)
Filter Life (Hours)	4,000 Hours
Computer	IBM Compatible VGA, SVGA, XGA, WXGA/WXGA+/SXGA/SXGA+/UXGA (compressed), MAC16"
Video	525i (480i), 525p (480p), 625i (576i), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60)
Supplied Accessories	Power Cable (4.5m) x1, Computer Cable (5.0m) x1, USB Cable (5m) x1, Interactive Pen x2, Pen Tip x4, AAA Batteries x4, IR Remote Control Unit x1, AA Batteries x2, Cable Cover x1, Application CD (for network, etc.) x1, Application DVD (for interactive) x1, CD User Manual x1, Concise User Manual x1, Adapter Cover x1
Optional Accessories	USB wireless adaptor USB-WL-11N, Wall mount unit: HAS-WM03, HAS-WM05 (Low ceiling wall mount), TT-03 Table Top Kit, HAS-WB01 (XGA mount adaptor) HAS-WB02 (WXGA mount adaptor)
Remote Control	HLC03033
Replacement Lamp / Filter	DT01411 / UX37191 (Hybrid)
Projector / Lamp Warranty	3 years / 3 years (for education and extended warranties please contact your local dealer)

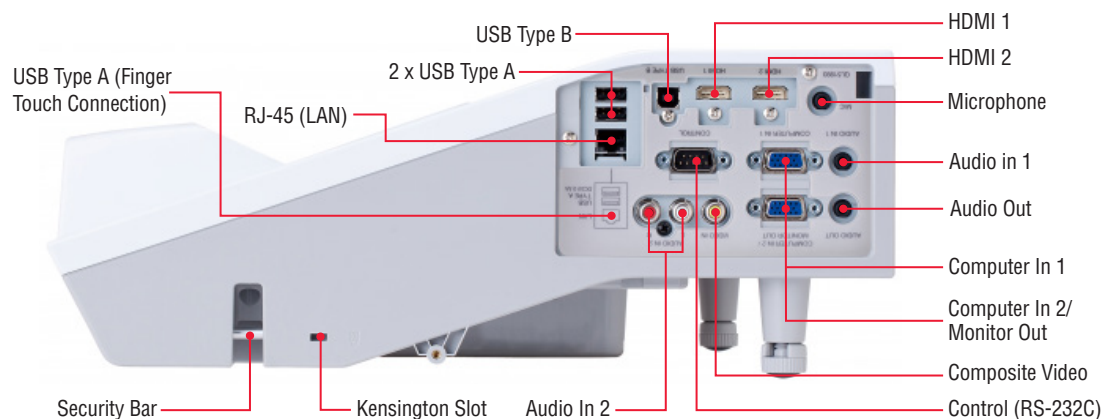

Interactive Pen

Dealer Stamp

maxell
Within the Future

Maxell Limited
Whitebrook Park, Lower Cookham Road,
Maidenhead, Berkshire, SL68YA
Tel: +44 (0)1628 585 000 / Fax: +44 (0)1628 585 163
www.maxelldisplay.com